

**UNIFIED COMMUNICATIONS****INFORMATIONS****4K Huddle/Conference webcam with autofocus**

The 13MP UC CAM80UM featuring 2D and 3D denoising technologies delivers sensational smoothness and detail, even in low light conditions. An integrated 2 microphone array detects audio from up to 4 metres away. Easy to set-up and supporting 360-degree horizontal rotation with 10-degree angle adjustment, this huddle space camera supports all the leading conferencing software like Zoom, Skype, Microsoft Teams and more.




### **80° field of view**

The field of view means the viewable area one can see through the camera lens. It translates directly to how much of your meeting space will be visible to the participants joining remotely. An 80° FoV is perfect for huddle spaces which usually seat two to four people.



### **2D & 3D Digital Noise Reduction**

Delivering high image quality, these two image denoising technologies combined ensure crisp and clear visuals for video and photos, even in low light conditions.

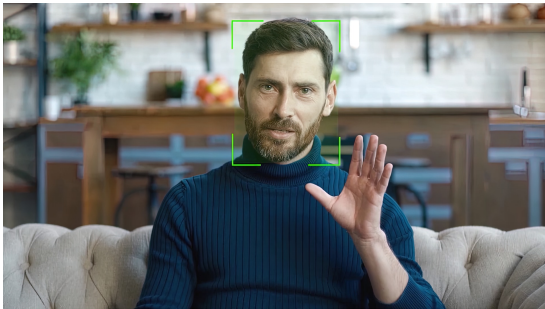

### **Auto-focus & TLens®**

With the TLens® technology guaranteeing seamless transitions, your camera can quickly focus on your face, from the moment you sit in front of the lens to start the meeting.



### **Clear, crisp and natural audio**

Featuring an advanced noise reduction algorithm, the integrated 2-element mic array detects audio from up to 4 metres away, delivering high quality audio free from any annoying background noise or distortion.

## SPECIFICATION

### Camera

<b>Pixels</b>	13M
<b>Native resolution</b>	4K UHD
<b>Supported resolutions</b>	2160p/30fps, 1440p/30fps, 1080p/30fps
<b>Diagonal field of view (dFoV)</b>	80°
<b>Focus mode</b>	auto
<b>Aperture</b>	2.2

### Audio

<b>Number of microphone arrays</b>	2
<b>Voice pickup distance</b>	4m
<b>Voice pickup angle</b>	180°

### Connectivity

<b>Camera</b>	USB Type-C
---------------	------------

### MECHANICAL

<b>Tilt angle</b>	≤10°
<b>Rotation</b>	360°

### ACCESSORIES INCLUDED

<b>Cables</b>	USB 2.0 (type A to C)
---------------	-----------------------

### SUSTAINABILITY

<b>Regulations</b>	CE, RoHS support, ErP, WEEE, REACH
--------------------	------------------------------------

### DIMENSIONS / WEIGHT

<b>Product dimensions W x H x D</b>	117 x 53.5 x 48.5mm
<b>Box dimensions W x H x D</b>	154 x 86 x 82mm
<b>Weight (without box)</b>	0.16kg
<b>Weight (with box)</b>	0.31kg
<b>EAN code</b>	4948570033003

### RELATED INFORMATION

<b>Related products</b>	<a href="#">UC CAM120ULB-1</a> , <a href="#">UC CAM120UL-1</a> , <a href="#">UC CAM180UM-1</a> , <a href="#">UC CAM75FS-1</a> , <a href="#">UC SPK01M</a> , <a href="#">UC SPK01L</a>
-------------------------	---



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED