


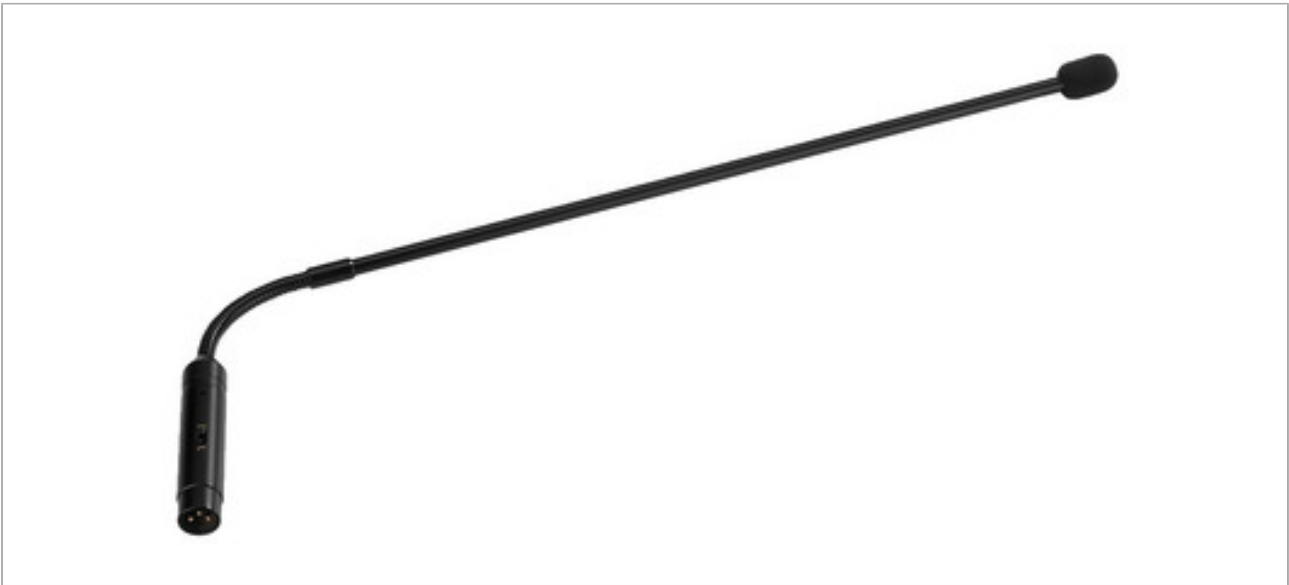

EMG-650P

Order No.: 0234330

PRODUCTINFOS

Electret gooseneck microphone,

with switchable low cut filter.

This microphone features an excellent radiation and a clear voice reproduction.

- Cardioid polar pattern
- Wide transmission range
- Switchable low cut 180 Hz (12 dB/oct)
- Electronically balanced output
- Low acoustic feedback
- Unobtrusive power LED in the XLR connection terminal
- Foam windshield
- Total length: 600 mm

TECHNICAL SPECIFICATIONS

EMG-650P

Description	gooseneck microphone
Transmission method	cable
Polar pattern	cardioid
System	electret
Audio frequency range	30-18,000 Hz
Nominal impedance	180 Ω
Sensitivity	4.5 mV/Pa
Max. sound pressure	130 dB
Power supply	DC 9-48 V, phantom power
Admiss. ambient temp.	0-40 °C
Dimensions	Ø 9/19 mm x 600 mm
Weight	171 g
Connection	XLR
Packing dimensions (W x H x L)	0.02 x 0.02 x 0.6 m
Gross weight	0.225 kg
Net weight	0.171 kg