




[Visit product page](#)

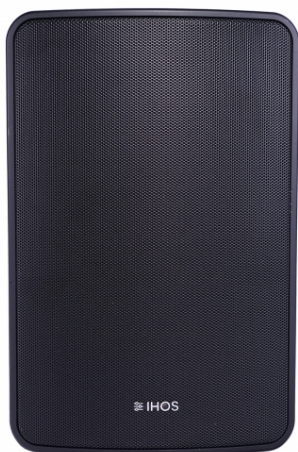

CLIMATE IP6 -BLACK

L005758

High Quality public address 2 way speaker, dust-proof and waterproof IP55, 100/70V and 8 $\bar{U}$, U type steel bracket included, ideal for out door installations, max input 90W/100V , 180W/8 $\bar{U}$, SPL 90 dB, 6.5?? Woofer + 1?? Tweeter, rugged HIPS black housing.

TECHNICAL DETAILS

Technical Specifications

Rate Power: 60W@100V; 90W@8 $\bar{U}$.

Max Power: 90W@100V; 180W@8 $\bar{U}$.

Impedance: 83 $\bar{U}$, 167 $\bar{U}$, 333 $\bar{U}$, 667 $\bar{U}$, 1.33k $\bar{U}$.

Power Select: 100V: 60W, 30W, 15W, 7.5W; 70V: 60W, 30W, 15W, 7.5W, 3.75W.

S.P.L(1W / 1m): 90dB.

MAX S.P.L(Rated / 1m): 108dB@100/70V; 110dB@8 $\bar{U}$.

Frequency Response(-10dB): 70Hz~20kHz.

Spread Angle (4kHz / 1kHz): 90° / 190°.

Power Select Operate: Rotating Selection Switch.

Material: Housing: HIPS; Grille: Steel.

Operate Temp/ Humidity: -30°C ~ 60°C; <95%.

Dustproof/ Waterproof degree: IEC529 IP55.

Speaker Unit: 6.5”Woofer + 1”Tweeter.

Size: 214 (W) x 329(H) x 178(D).

Net Weight: 4.8kg.


Installation: U Type Mounting Bracket or Optional Other Bracket.

PHOTOS



PRODUCT VIDEO





www.fos-lighting.eu

