




Get ahead with the GB2745QSU Black Hawk with IPS Panel Technology and 1ms MPRT

Indulge in exceptional gaming excellence with the 27" GB2745QSU Black Hawk monitor. This display boasts cutting-edge IPS panel technology, a 100Hz refresh rate, and an ultra-swift 1ms MPRT response time. Elevate your gaming adventure to the next level, thanks to FreeSync Technology and the Black Tuner function, ensuring crystal-clear visibility even in the darkest scenes. In addition, equipped with a high adjustable stand (15cm).

Available also with fixed stand : [G-Master G2745HSU-B1 \(1920x1080\)](#) and [G-Master G2745QSU-B1 \(2560x1440\)](#)

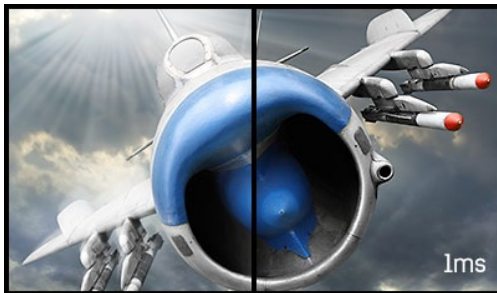

1ms

Fast response time is key to ultra-smooth gaming. It reduces ghosting and blurring providing the user with an improved graphic performance.



100Hz

A 100Hz refresh rate translates into increased smoothness of the image. This means that flickering is reduced and therefore eye fatigue is also less noticeable. The increased frequency also means smoother transitions between contrasting colours, smoother motion scenes in both movies and gaming, and even reduced mouse cursor flickering.

01 DISPLAY CHARACTERISTICS

| | |
|----------------------|---|
| Diagonal | 27", 68.5cm |
| Panel | IPS, matte finish |
| Native resolution | 2560 x 1440 @100Hz (3.7 megapixel) |
| Aspect ratio | 16:9 |
| Panel brightness | 250 cd/m ² |
| Static contrast | 1300:1 |
| Advanced contrast | 80M:1 |
| Response time (MPRT) | 1ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mIn |
| Horizontal Sync | 30 - 151kHz |
| Viewable area W x H | 596.7 x 335.7mm, 23.5 x 12.2" |
| Pixel pitch | 0.233mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|---|
| Signal input | HDMI x1 (v.2.0) DisplayPort x1 (v.1.2) |
| USB HUB | x2 (v. 3.2 Gen 1 (5Gbps, DC5V, 900mA)) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|--------------------|--|
| Blue light reducer | yes |
| Flicker free | yes |
| FreeSync support | 1920 x 1080 @48-100Hz |
| Extra | i-Style Colour |
| OSD languages | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu, Up/Right/Volume, Down/Left/Black Tuner/MBR/AMD FreeSync/Night Mode Button, Input Select/Exit |
| User controls | picture adjust (contrast, brightness, OD, AC, Eco, black tuner, colour saturation, MBR, AMD FreeSync), input source, audio settings (volume, mute audio), user modes, colour settings (6-Axis, gamma, blue light reducer, colour temperature, user preset), image adjust (i-Style Colour, sharp and soft, RGB range, video mode adjust), language, setup menu (OSD h. position, OSD v. position, OSD time, OSD rotate, opening logo, LED), display information, recall |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC2B, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|--------------------------|
| Display position adjustments | tilt |
| Height adjustment | 150mm |
| Rotation (PIVOT function) | 90° |
| Swivel stand | 45°; 45° left; 45° right |
| Tilt angle | 23° up; 5° down |
| VESA mounting | 100 x 100mm |

Cable management system

yes

05 ACCESSORIES INCLUDED

Cables

power, USB, HDMI, DP

Other

quick start guide, safety guide

06 POWER MANAGEMENT

Power supply unit

internal

Power supply

AC 50 - 60V, 100/240Hz

Power usage

21W typical, 0.5W stand by, 0.3W off mode

07 SUSTAINABILITY

Regulations

CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA

Energy efficiency class (Regulation (EU) 2017/1369)

E

REACH SVHC

above 0.1%: Lead

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D

611.5 x 555.5 x 214mm

Box dimensions W x H x D

691 x 142 x 447mm

Weight (without box)


5.5kg

Weight (with box)

7.2kg

EAN code

4948570122783

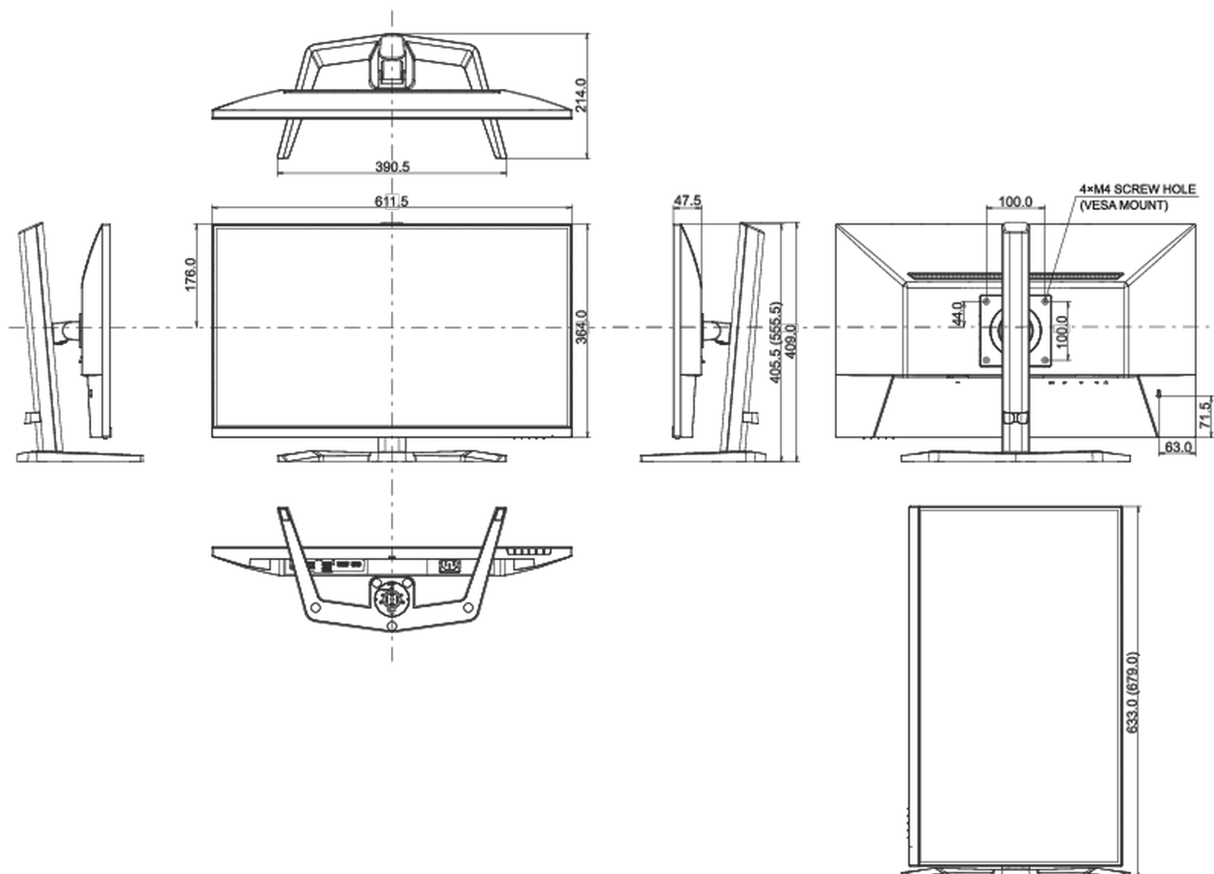

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED